

360° HD Panoramic Fire SmartCam



Features and Functions

Smoke/ Motion/Dangerous Gas detection & intelligent alerts

- Alarm will be generate when motions are detected and real-time notification is send to your smart phone or tablet.
- Alarm will be generate when Smoke are detected and real-time notification is send to your smart phone or tablet.
- Alarm will be generate when dangerous gas are detected and real-time notification is send to your smart phone or tablet.
- Available to open motion/smoke/dangerous gas detection simultaneously, make security upgraded. Meanwhile, the occurrence of any of these events will trigger the alarm and push message fire/motion alarm text notification to your smart phone.
- Available to arbitrarily set detection level through your smart phone or tablet in according to your needs.
- In the case of 3 meters high, the local alarm sound is more than 80dB.



Camera Features

- 2.0Megapixel CMOS sensor (1920*1080@25fps)
- 1.29mm 360° Panoramic Lens
- with 9pcs white leds / warm light for optional, Support adjust LED light on APP
- support two way audio
- max 128G TF Card
- Support remote control by smart phone,iphone/android
- Widely used for prevent fire occurrence, hazardous gas detection and alarm, air quality monitoring and warning area.

Specifications

General	Model Number	WDM-FSC360IP13A
	Color	White
	Power supply	5V2A Power Port
	Power consumption	<7W
	Illumination	9pcs white leds / warm light For optional (Other color LEDs available for customization)
Camera	Sensor	1/3" Progressive Scan CMOS
	Sensibility	Color 0.02Lux@F2.2
	Lens	1.29mm@F2.2, 185° fisheye lens
	Field of View	360° Panoramic
Function	Two-way audio	Support
	Motion Detection	Support
	Smoke Detection	Support
	Dangerous gas detection	Support, included formaldehyde, benzene, carbon monoxide, hydrogen, alcohol, ammonia, etc.
	Alarm Sound	>80dB (3m high)
	Advance Event Management	Triggered by Smoke or Motion, notification push to your smart home or tablet
	smoke and gas detection sensitivity settings	(0-3 value, larger value, more sensitive)
Video	Video code	H.264
	Audio code	AAC
	Resolution	1920*1080 (2.0MP)
	Frame rate	Max 25 fps
Wireless	standard	IEEE802.11b/g/n
	Frequency	2.4GHz~2.4835 GHz
Port	Micro SD	Support Up to 128GB Micro SD Card (TF Card)
	Reset	One button reset
Image/video	Mobile APP	Support IOS/Android
		Support live view and playback on phone
		Support record and snapshot on phone.
		Support adjust LED light on APP
Environmental	Operating Temperature	Support smoke/motion two detections alert simultaneously, notification push to your phone or tablet
		-15~50° C
		Storage Temperature
	Operating Humidity	10% ~ 95% with no condensation

Parts & Dimension

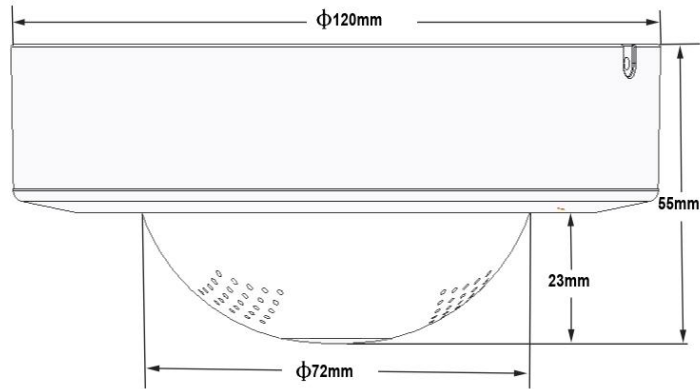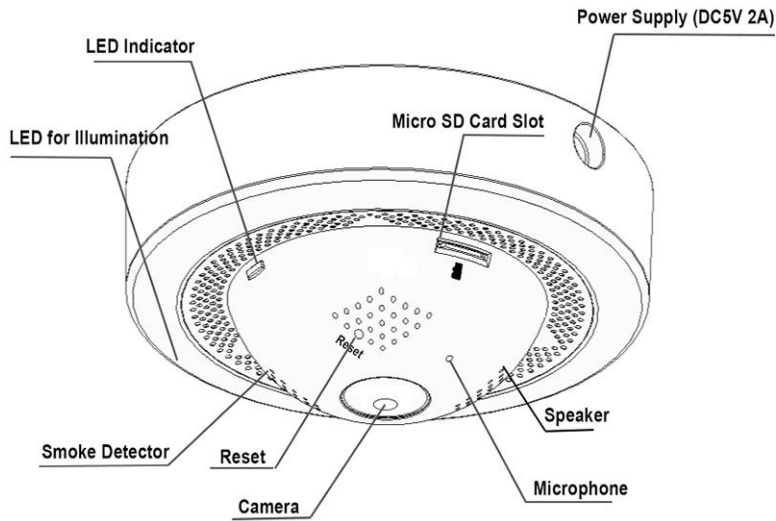

Available Models

WDM-FSC360IP13A

APP Name

Fire SmartCam



Apple



Android

Shenzhen Wardmay Technology Co., Ltd

Head office: 205, 2nd Floor, Building B, No. 41, Guiping Road, Henggang street, LongGang District, ShenZhen, China

E-mail: sales@wardmay.com / sales3@wardmay.com

Phone: +86-15915495854 / +86-18680300839