


重型粉碎机RG-56E
Heavy duty granulator



重型粉碎机RG-66S
Heavy duty granulator

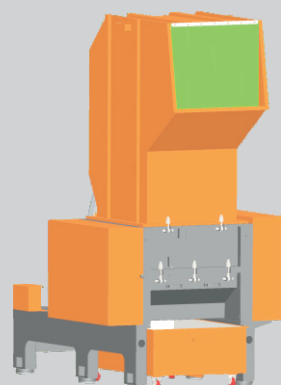

重型粉碎机适用于破碎不同种类的管材、型材、板材,较厚的料头、料件,包装材料、容器、电缆等塑胶次品、废品,提高了塑料利用率。

Description :

Heavy-duty granulator is suitable for crushing different kinds of heavy wall fittings, pipes, profiles, sheet, blocks, high impact applications, thicker material head, plastic container, package material and cable etc.

宁波北仑日宏机械制造有限公司
Ningbo Beilun Rhong Machinery Manufacturing Co., Ltd

地址：浙江.宁波.北仑.小港街道.东岗碶.
Donggangqi, Xiaogang Subdistrict, Beilun,
Ningbo, Zhejiang Province, China.
T +86-574-55019010 , 0086 137 7723 9417
F +86-574-55019017
E-mail: leysa@plasticmachine-tool.com



WECHAT




WEBSITE



更多咨询请访问：

www.plasticmachine-tool.com

重型粉碎机RG-56E
Heavy duty granulator

重型粉碎机RG-66S
Heavy duty granulator

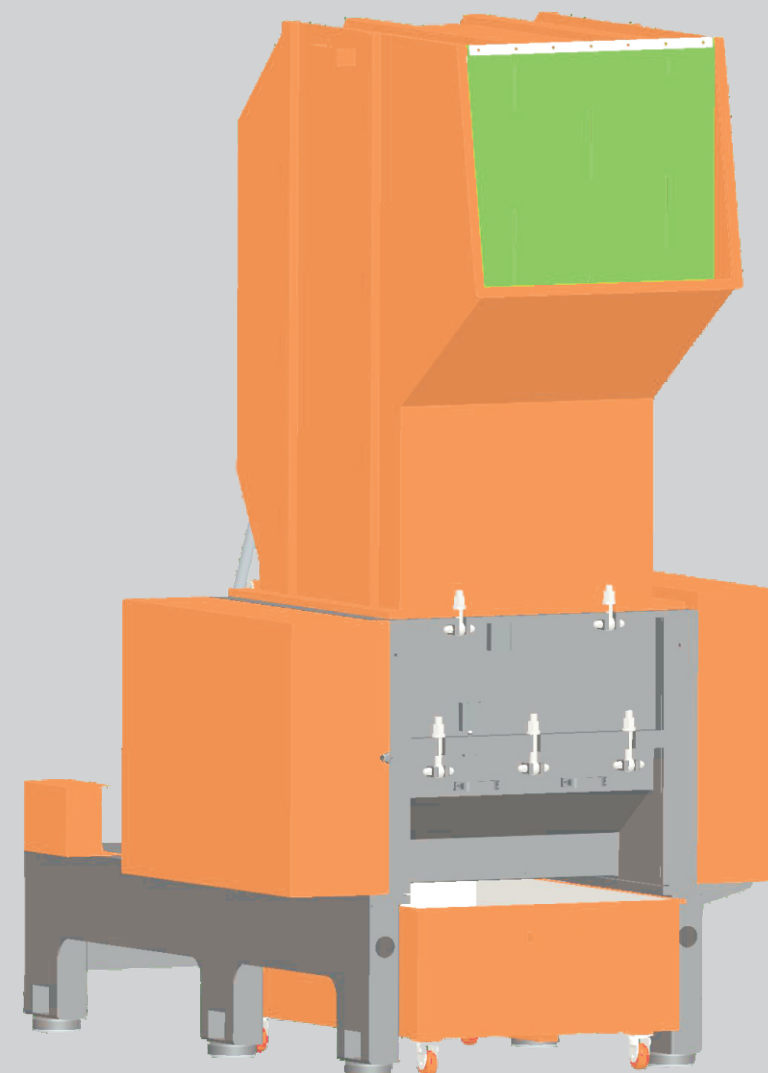


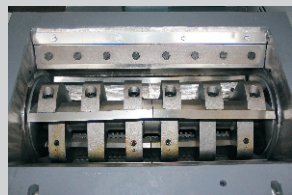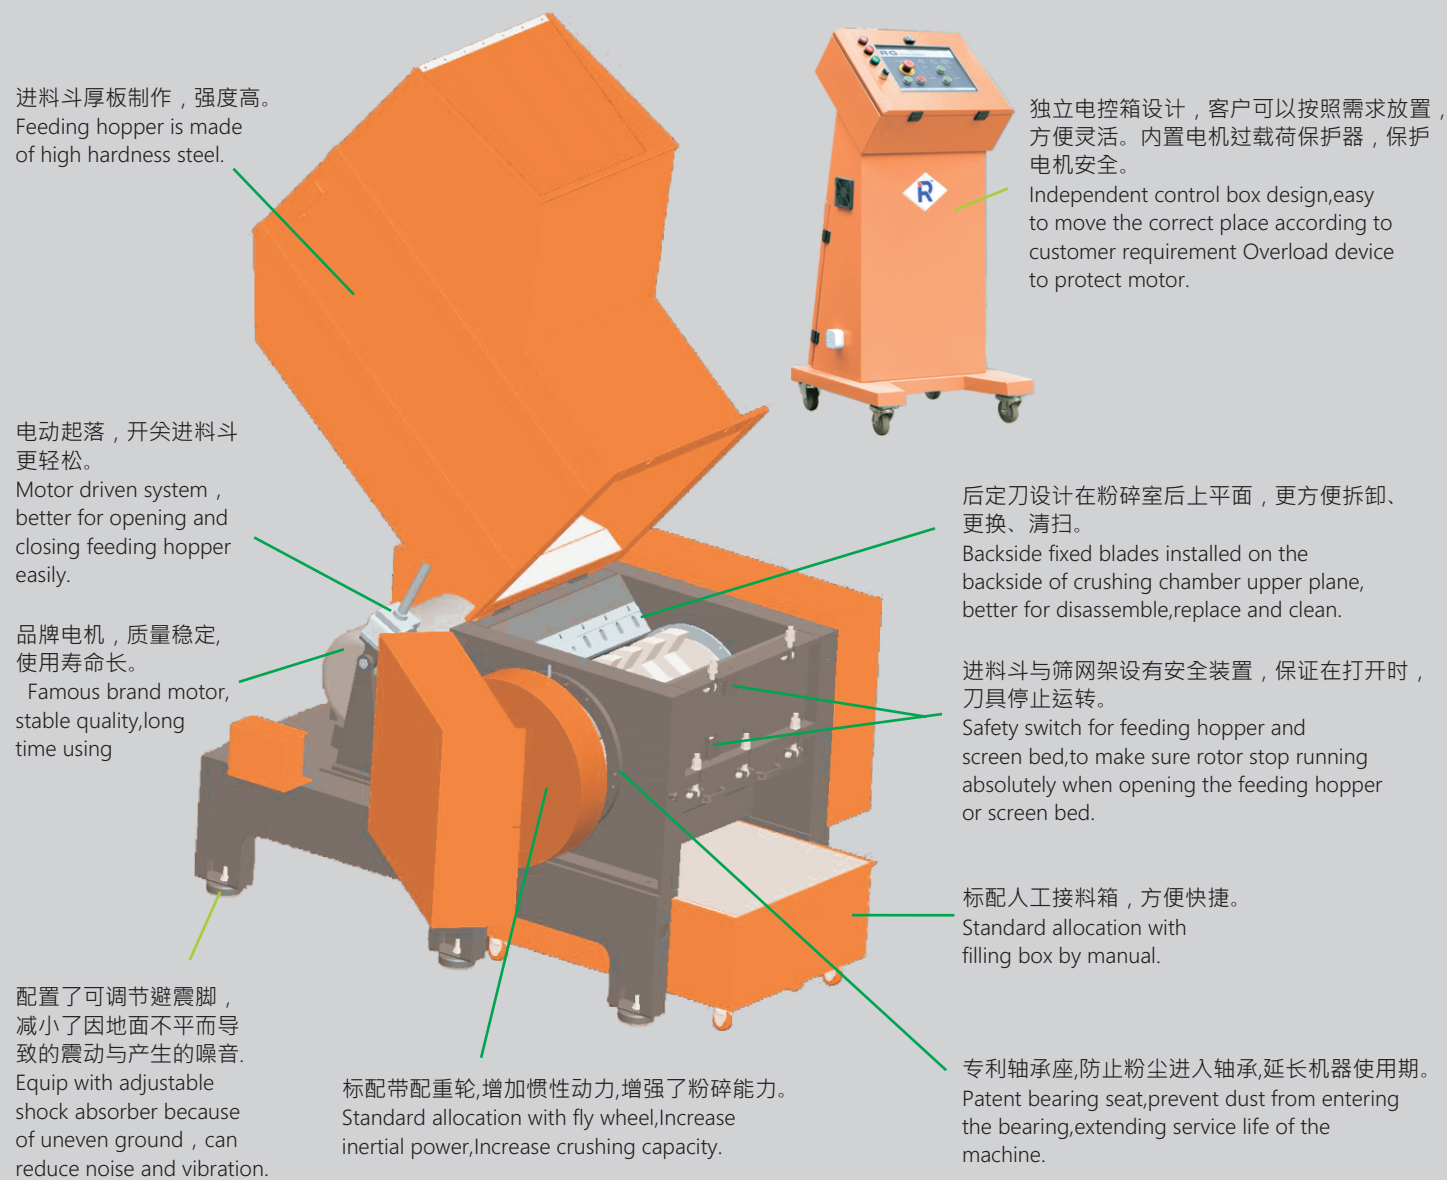


RG-56E
片刀型 Paddle blades type

刀具采用"V形"切割技术，切削时物料从两侧向中心滑动，避免材料与机器侧壁的摩擦与堵塞。
多种刀架设计可供客户选择：
1. 若为硬质球状料则选用爪刀型粉碎机；
2. 若材料为薄壁壳管类、瓶类的产品需破碎回收要选用片刀型粉碎机；

V type design, during crushing process, material will be crushed in claw blades center point, avoid friction and blockage between material and side wall.
How to choose the correct blades type:
1. If hardness block material, please choose staggered blades type central granulators.
2. If Thin-walled housing, bottles, please choose paddle blades type central granulators.

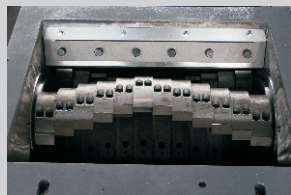

RG-56EA
爪刀型 Staggered blades type

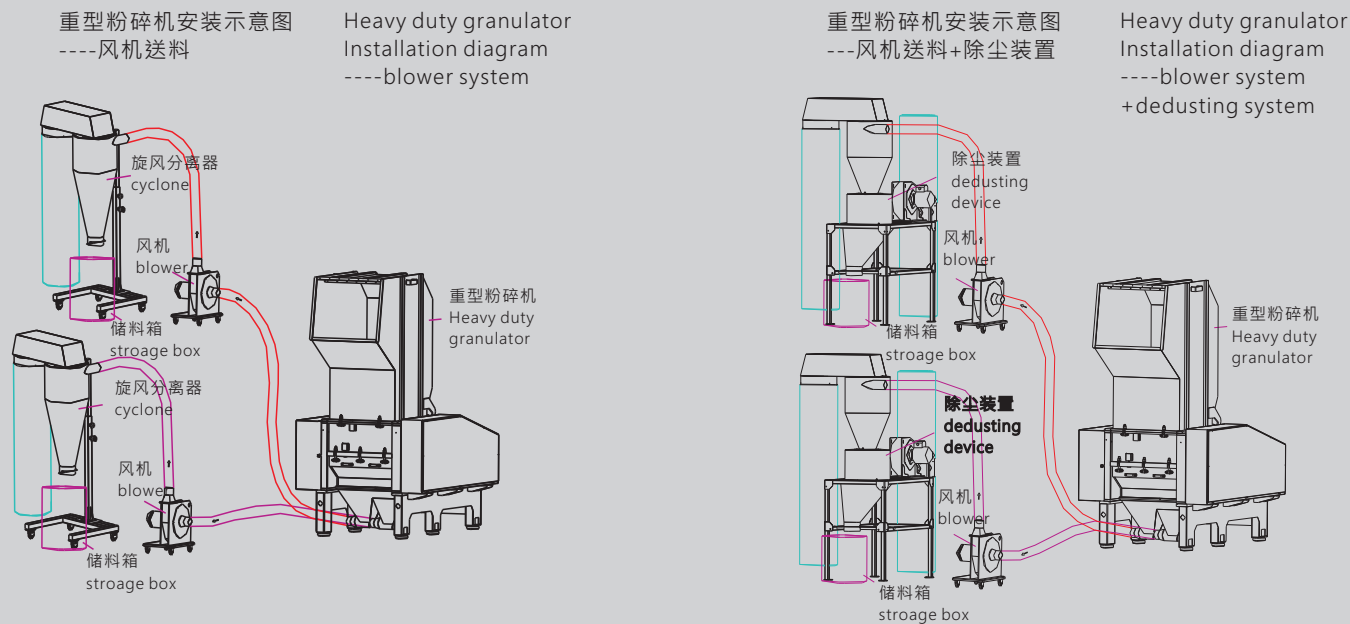

规格表Specifications

机型Model		RG-5680E	RG-56100E	RG-56120E
电机功率 Power	kw	30	45	55
主轴转速 Rotor speed	rpm	560	560	560
活动刀 Rotating blades	PCS	6 ●	6 ●	6 ●
	-A PCS	30 ○	39 ○	
固定刀 Fixed blades	PCS	4	4	4
筛网孔径 Screen diameter	mm	φ12	φ12	φ12
粉碎室尺寸 Cutting chamber size	mm	800X800	800X1000	800X1200
粉碎能力 Output	kg/h	1000 ~ 1600	1200 ~ 2000	1500 ~ 2500
粉碎时噪音 Noise	dB(A)	90 ~ 110	90 ~ 110	90 ~ 110
人工接料箱 Material box		●	●	●
进料斗电动起落 Motor lifting device for hopper		●	●	●
风机送料系统 Blower conveying system	-F	2.2KW X2 ○	2.2KW X2 ○	2.2KW X2 ○
筛网架电动起落 Motor lifting device for screen bed		○	○	○
粉尘分离系统 Dust separator system		○	○	○
重量 Weight	kg	3190	3500	3800
外形尺寸(L×W×H) External size	mm	2585X159X2960	2585X181X2960	2585X198X2960

产品规格若有变更，恕不另行通知。
Please excuse for not note if some specifications of products are changed.

Note 注：

- "●"为标配，"○"为选购。
"●" is standard allocation, "○" is selection purchase.
- 标配为片刀型结构，"-A"为爪刀型结构。
"V" shaped paddle blades type is standard allocation, "-A" means claw blades type (staggered blades type).
- 最大粉碎量取决于筛网孔径及粉碎材料等因素。
The max. shredding quantity depend on the mesh hole diameter and shredding material quality.
- 机器电压规格为3Φ, 380V, 50Hz。
The machine voltage specification is 3Φ, 380V, 50Hz.
The voltage can be changed as you require.

