


**G-Motor Machinery & Electric Products Co., Ltd.**

Model : GL44-402D-070-33  
 Power Rating : 24VDC, 3A  
 Rated Torque : 4 N.M  
 Rated Current : 3 A  
 Rated Speed : 50 RPM

Part No. : [Bar Code]  
 71120-4440207033

Serial No. : [Bar Code]  
 2018-03-00001

Rated Voltage : 24 VDC  
 No Load Current : ≤0.6 A  
 No Load Speed : 70 RPM  
 Start Torque : 5 N.M  
 Rated Torque : 4 N.M  
 Rated Current : ≤3.0 A  
 Rated Speed : 50 RPM  
 Stall Torque : 15.2 N.M  
 Stall Current : 11 A  
 No Load Noise : 62 dB  
 Load Noise : 60 dB  
 Rotation : CW/CCW

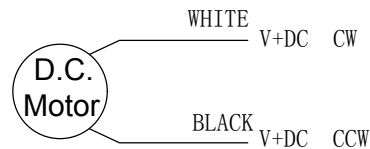

**CIRCUIT DIAGRAM**

**Noted:**

1. Internal adjustable limit switch
2. Die-cast aluminum gear housing
3. Aluminium alloy inner and outer tube
4. ACME screw

Customer		Customer Confirmation:		Tolerance	Dimension	mm/inch
Product	Gear Motor			X ±0.2	PAGE 1 OF 1	
Model	GL44-402D-070-33			X.X ±0.1	View Angle	
Design		Scale	1 : 3	X.XX ±0.05		
Review		G-MOTOR MACHINERY & ELECTRIC PRODUCTS CO., LTD				
Approve						