





HSF

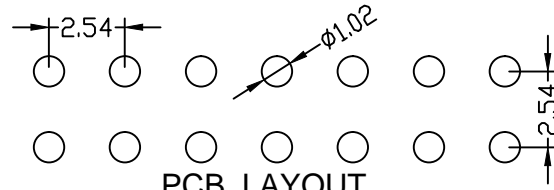

RoHS

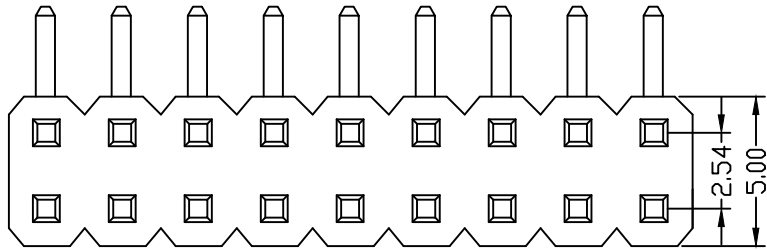

PCB LAYOUT

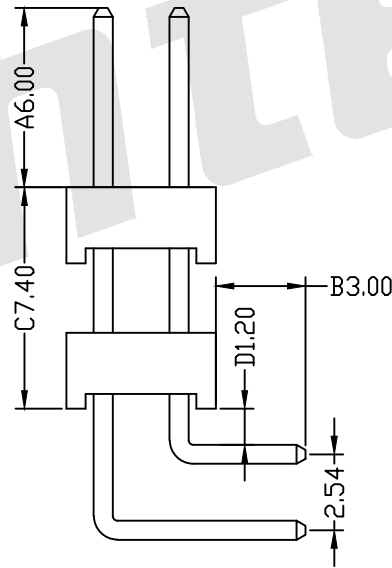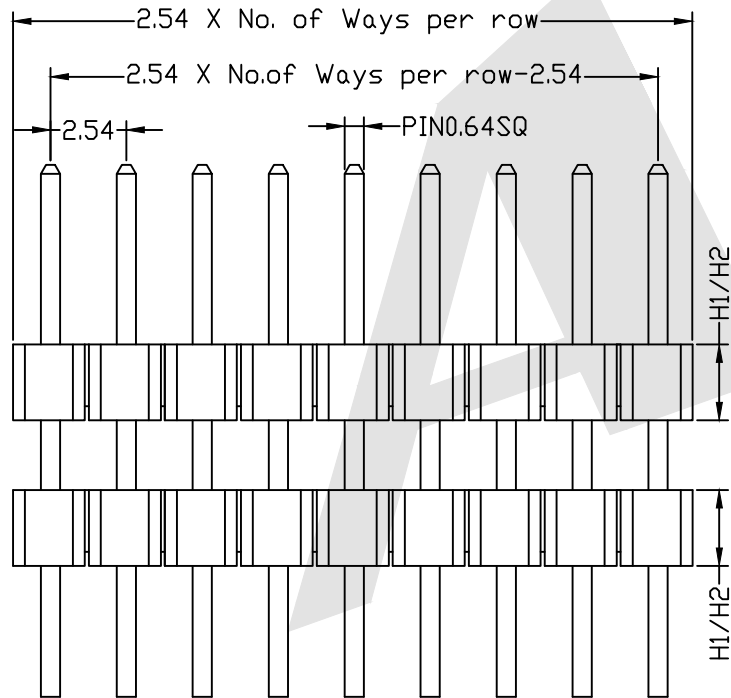

SPECIFICATION

Current Rating: 3 Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PBT, UL 94V-0 Black

Ordering Code:

PHER07 - X - X - D - A - C - D - B - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts: 02 To 80
- ③ Contact Plating:
 G0: Gold flash S0: Selective
 G1: 3U" Gold S1: Selective 3u"
 G2: 5u" Gold S2: Selective 5u"
 G3: 10u" Gold S3: Selective 10u"
 G4: 15u" Gold S4: Selective 15u"
 G5: 30u" Gold S5: Selective 30u"
 SN: Tin
- ④ Connector Type
 D: Dual
- ⑤ Pin Length:
 A: 0600=6.00mm
 C: 0740=7.40mm
 D: 0120=1.20mm
 B: 0300=3.00mm
 Please mark the desired length in the A/C/D/B
- ⑥ Insulator Material
 A: PBT
 B: PA6T
 C: LCP
 D: PA46
 E: PA9T
- ⑦ Packing:
 A: Tray
 B: Bag
 T: Tube
 U: Tube+CAP
 R: Tape&Reel
 W: Tape&Reel+CAP
- ⑧ Plastic High
 H1: 1.70mm
 H2: 2.54mm
 H3: 2.00mm
 H4: 1.50mm

Standard IE P/N : PHER07-10-G0-D-0600-0740-0120-0300-A-B-H1

A	C	D	B
6.00	7.40	1.20	3.00

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

Antenk ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail: sales@antenk.com

Optional SCALE: As Shown UNIT: mm
 DRAW YG ZHONG DATE 01/05/2016
 CHECK BobYang DATE 01/05/2016

TITLE:
 2.54mm Pin Header DualRow Double Plastic Angle Type

DRAWING NO: PHER07-XXD-0600-0740-0120-0300-XXX
 PRODUCT NO: PHER07-XXD-0600-0740-0120-0300-XXX

REV	DESCRIPTION	DATE
	ADD H4=1.5MM	2017/04/14
	Increase packing method and material	2016/10/25

