

FEATURES:


- 1 Electrical Test:
 - A.250V AC max at 2 amps.
 - B.Dielectric with standing 500volts AC.
 - C.Insulation Resistance:500 megaohms.
 - D.Termination Resistance: 35megaohms.
- 2 Mechanical:
 - A.Cable-to-Plug tensile strength-20LBs(89N)min.
 - B.Durability:500 mating cycles.

Ordering Code:

ATRP6P6C - X - A - X - 001

① ② ③ ④ ⑤

- 1. Series:
- 2. Housing Material:
 - A:UL 94V-0
 - B:UL 94V-2
- 3. Contact Type:
 - A:2 Prongs for stranded wire
 - B:2 prongs for solid wire(SS)
 - C:3 prongs for solid wire(S)
- 4. Gold plating :
 - A:1u" B:3u"
 - C:6u" D:15u"
 - E:30u" F:50u"
- 5. Serial number:

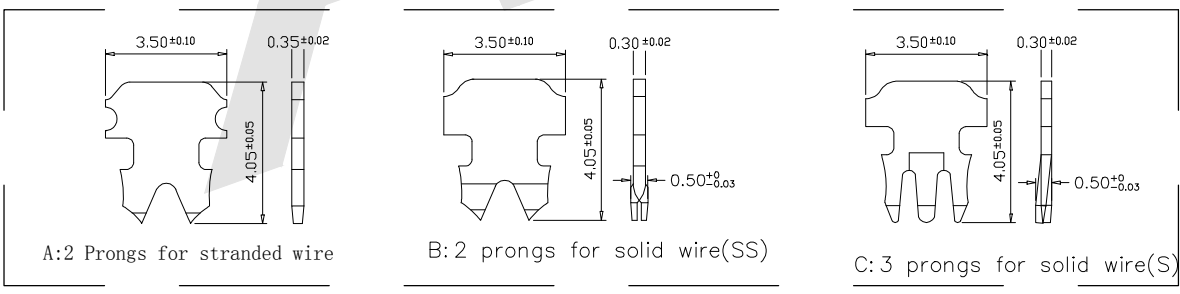


Unless Otherwise specified tolerance
 X ±0.35
 X.X ±0.25
 X.XX ±0.20
 X.XXX ±0.15

Antenk ANTEK ELECTRONICS CO.,LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

SCALE: As Shown UNIT: mm

DRAWN: Wu Feng Rong

CHECKED: YANG



TITLE:
Plug 6P6C Serial unshielded Type

DRAWING NO: ATRP6P6C-XAX-001

PRODUCT NO: ATRP6P6C-XAX-001

REV	DESCRIPTION	DATE
	Add option of plating	13/11/26