





7W Face Change CCT Downlight



Detailed parameter:

|                    |                                |
|--------------------|--------------------------------|
| Product Name:      | 7W Face Change CCT Downlight   |
| Model No:          | 7WDLCTC5                       |
| Power Consumption: | 7Watt                          |
| Input Voltage:     | 220~240V AC                    |
| LED Chips:         | Bridgelux CSP COB SDCM<3       |
| Color Temperature: | 2700K <--->3000K <---> 4000K   |
| Total Lumen:       | 560lm<> 650lm<>600lm           |
| CRI:               | 82~85 Ra / 90 Ra option        |
| Beam Angle:        | 60°                            |
| Power Factor:      | 0. 95                          |
| Dimension:         | φ 83*85mm                      |
| Hole-cut:          | 68-75mm                        |
| Dimmable:          | Yes (PWM & Triac dimming)      |
| Smart control :    | option (Zigbee/Bluetooth/Wifi) |
| Lamp Lifespan:     | 50, 000H                       |
| Warranty:          | <b>5 YEAR</b><br>Warranty      |

# 7W Face Change CCT Downlight








## Features


- CSP COB Technology
- CCT Switch
- Easy Face Change
- Quick Connector
- Fire-rated

## Size

- $\phi$  83mm\*85mm
- Hole-cut: 68-75mm

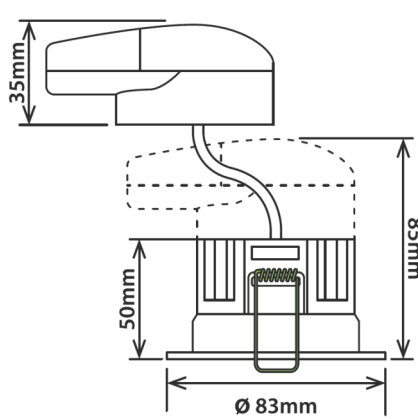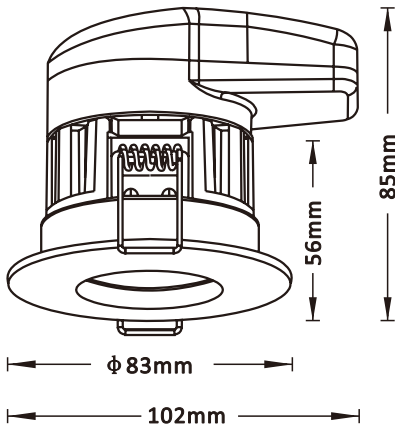

Switch : 2700K / 3000K / 4000K

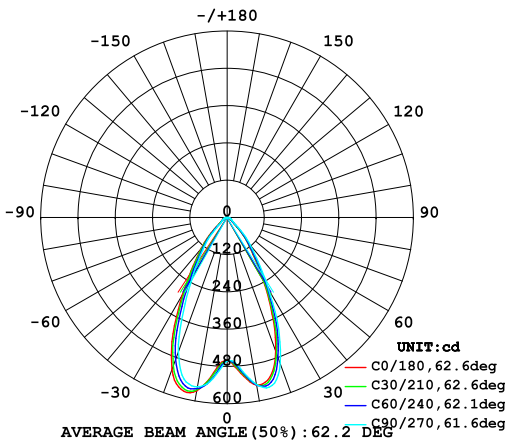

Flux out: 383.2 lm

| Height  | Beam | Flux (lm)     | Illuminance (lx) | Angle (deg) | Diameter (mm) |
|---------|------|---------------|------------------|-------------|---------------|
| 3.281ft | 1m   | 31.39, 50.32  | 337.9, 541.61    | 61.62       | 119.26        |
| 6.562ft | 2m   | 7.849, 12.586 | 84.47, 135.41    | 61.62       | 238.52        |
| 9.843ft | 3m   | 3.488, 5.591  | 37.54, 60.181    | 61.62       | 357.78        |
| 13.12ft | 4m   | 1.962, 3.145  | 21.12, 33.851    | 61.62       | 477.04        |
| 16.4ft  | 5m   | 1.256, 2.013  | 13.52, 21.671    | 61.62       | 596.30        |


## IES DATA

## Package




1 pc

96\*95\*100mm



10 pcs/1 inner box

510\*200\*105mm



5 inner boxes/1 carton

530\*255\*550mm 18KG/Ctn